




AC/DC-Power Supply Series PC5400 max. 10000 Watt

VAC- input voltage ranges					output			OVP set VDC
93-138 1ph	185-264 1ph	160-230 3ph.	320-460 3ph.	410-530 3ph.	output Amps	VDC 2)		
						min.	max.	
----	----	----	----	----	----	11	13	15
----	----	----	----	----	----	14	16	18
----	----	PC5464V	PC5484V	PC5494V	350	23	26	30
----	----	PC5465V	PC5485V	PC5495V	330	26	30	35
----	----	PC5466V	PC5486V	PC5496V	147	58	68	70
----	----	PC5467V	PC5487V	PC5497V	77	100	130	140
----	----	PC5468V	PC5488V	PC5498V	40	200	250	280
----	----	PC5469V	PC5489V	PC5499V	180	45	55	60

Output voltages up to 400VDC possible
2) Adjustable range

Features

output	adjustment over voltage protection OVP	trimmer behind front panel 110-130% U_{nom}
	overload	constant current limit
	adjustment current limit	trimmer behind front panel 80-110% I_{nom}
	sense lines	existing
	adjustment voltage	trimmer behind front panel
	function control	green LED on front panel
	alarm indication turn off at U_{out} reset of alarm	red LED on front panel over voltage >5s push button on front panel
input	turn off at U_{in}	fixed <95% U_{min} >105% U_{max}
safety	turn off at high temperature	automatic return

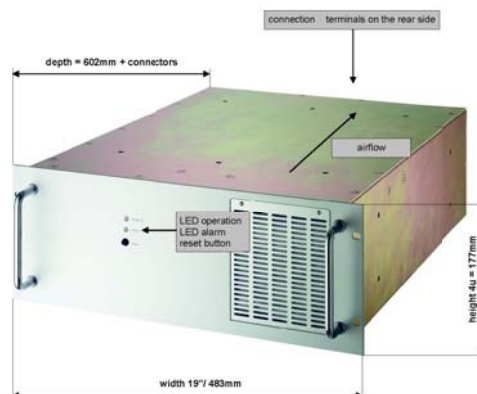

PC5400

Construction	19" Subrack 84TE, 4u high, app. 600mm depth + Terminals app. 80mm (depending on type)
Connections	terminals on the rear side
Weight	app. 50,0kg