



AC/DC-Power Supply Series PC5700W max. 8000 Watt


W Mounting plate with terminals
Input, output, case isolated against each other

93-138	size.	output Amps	VAC- input voltage ranges				size	output Amps	output VDC 2)		OVP set VDC
			185-264	160-230 3ph.	320-460 3ph.	410-530 3ph.			min.	max.	
--	--	--	--	--	--	--	--	11	13	15	
PC5763W	R	385	PC5783W	PC5763VW	PC5783VW	PC5793VW	R	400	14	16	18
PC5764W	O	250	PC5784W	PC5764VW	PC5784VW	PC5794VW	O	310	23	26	30
PC5765W	O	215	PC5785W	PC5765VW	PC5785VW	PC5795VW	O	270	26	30	35
PC5766W	O	95	PC5786W	PC5766VW	PC5786VW	PC5796VW	O	120	58	68	70
PC5767W	O	54	PC5787W	PC5767VW	PC5787VW	PC5797VW	O	62	100	130	140
PC5768W	O	30	PC5788W	PC5768VW	PC5788VW	PC5798VW	O	32	200	250	280
PC5769W	O	115	PC5789W	PC5769VW	PC5789VW	PC5799VW	O	145	45	55	60

Output voltages up to **400VDC** possible
2) adjustable range

Features

output	adjustment over voltage protection OVP	trimmer on top side behind front panel 110-130% U_{nom}
	overload	constant current limit
	adjustment current limit	trimmer on top side behind front panel 80-110% I_{nom}
	sense lines	existing
	adjustment voltage	trimmer on top side behind front panel
	function control	green LED on front panel
	alarm indication	red LED on front panel
input	turn off at U_{in}	fixed <95% U_{min} >105% U_{max}
	reset of alarm	push button on front panel
safety	turn off at high temperature	automatic return

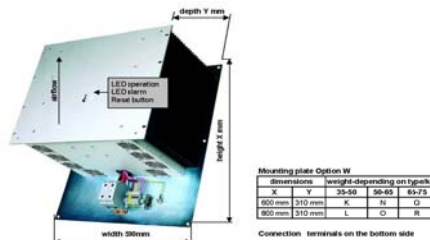

PC5700W

Construction	Mounting plate for wall mounting
Connections	terminals
Weight	depending on type