



## AC/DC-Power Supply Series PC5800W max. 12000 Watt


W Mounting plate with terminals  
Input, output, case isolated against each other

93-138	output Amps	VAC- input voltage ranges						output			OVP set VDC
		185-264	160-230 3ph.	size	320-460 3ph.	410-530 3ph.	size	output Amps	VDC 2)		
--	--	--	--	--	--	--	--	--	11	13	15
--	--	--	--	--	--	--	--	--	14	16	18
PC5864W	325	PC5884W	PC5864VW	R	PC5884VW	PC5894VW	R	400	23	26	30
PC5865W	280	PC5885W	PC5865VW	R	PC5885VW	PC5895VW	R	400	26	30	35
PC5866W	125	PC5886W	PC5866VW	R	PC5886VW	PC5896VW	O	180	58	68	70
PC5867W	65	PC5887W	PC5867VW	R	PC5887VW	PC5897VW	O	92	100	130	140
PC5868W	34	PC5888W	PC5868VW	R	PC5888VW	PC5898VW	O	48	200	250	280
PC5869W	155	PC5889W	PC5869VW	R	PC5889VW	PC5899VW	O	220	45	55	60

Output voltages up to **400VDC** possible  
2) adjustable range

### Features

<b>output</b>	adjustment over voltage protection OVP	trimmer on top side behind front panel 110-130% $U_{nom}$
	overload	constant current limit
	adjustment current limit	trimmer on top side behind front panel 80-110% $I_{nom}$
	sense lines	existing
	adjustment voltage	trimmer on top side behind front panel
	function control	green LED on front panel
	alarm indication	red LED on front panel
<b>input</b>	turn off at $U_{in}$	fixed $<95\% U_{min}$ $>105\% U_{max}$
	reset of alarm	push button on front panel
<b>safety</b>	turn off at high temperature	automatic return

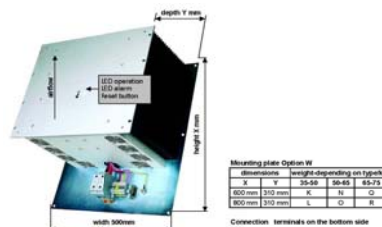

### PC5800W

Construction	Mounting plate for wall mounting
Connections	terminals
Weight	depending on type